HTB ELECTRICAL & AIR CONDITIONING PTY LTD
ABN 54 168 092 466 | Licence 376869C

QUOTE

0403 116 368 | htbelectricalandaircon@outlook.com

BILL TO
Dominic Tran
20/2-4 Jersey Road
Artarmon NSW 2064

CLIENT / SITE
Dominic Tran
20/2-4 Jersey Road
Artarmon NSW 2064

QUOTE DETAILS
Quote No. 22
Date 4th November 2026

DESCRIPTION	QTY	PRICE
- Supply 1 x 5kW Mitsubishi Electric split system air conditioner (reverse cycle, built-in Wi-Fi). + 1 x 5kW wall mounted indoor unit, model MSZ-AP50VGKD. + 1 x 5kW outdoor unit, model MUZ-AP50VG.	1	$1,650.00
- Supply all installation materials (copper pipes, cables, drain pipes, Colorbond trunking, white conduit, anti-vibration rubber feet, brackets and electrical materials) and labour for air conditioning installation and electrical installation. + 1 x 5kW wall mounted indoor unit will be installed on the wall above the TV in the living room. A 65mm hole will be core drilled through the brick wall directly behind the indoor unit for the copper pipes, cables and drain pipe to go through to the balcony. + 1 x 5kW outdoor unit will be located on the floor of the balcony, right behind the TV wall, with anti-vibration rubber feet. The copper pipes, cables and drain pipe will be covered by Colorbond trunking along the outside wall down to the outdoor unit. The drain pipe will run to the floor waste of the balcony. + 1 x 20A circuit will be installed at the switchboard in the kitchen. The cable will run behind the switchboard up to the ceiling, then across in white conduit along the ceiling between the 2 kitchen cabinets. A hole will be made through the brick wall into the wall cavity, and the cable will run inside the wall cavity to the core hole behind the indoor unit, then come out through the same hole as the copper pipes and down the Colorbond trunking to the isolation switch next to the outdoor unit on the balcony. + Pressure test, vacuum, commissioning and Wi-Fi setup.	1	$2,250.00

SUBTOTAL	$3,900.00
GST	$390.00
TOTAL	**$4,290.00**

TERMS & CONDITIONS

Air Conditioning:

- Deposit: Upon acceptance of this quote, a 60% deposit is required to allow us to order the air conditioning unit and the materials required for the job.
- Final payment: The remaining 40% balance is payable upon completion of the work.
- Warranty: We provide a 5-year manufacturer's warranty on the air conditioning unit, together with a 1-year warranty on our installation workmanship, subject to the applicable warranty terms and conditions.
- Quote Validity: This quote is valid for 10 working days from the date of issue. After this period, pricing and availability may be subject to change.

Electrical:

- Payment is payable upon completion of the work.
- This quote will expire in 10 working days.

Method of payment:

Bank Transfer (EFT): **Name:** HTB ELECTRICAL & AIR CONDITIONING P/L
BSB: 082 343
Account Number: 84 378 4720


Or PayID to 0403 116 368

INSTALLATION PLAN - QUOTE 22

Dominic Tran | 20/2-4 Jersey Road, Artarmon NSW 2064

Mitsubishi Electric 5kW split system: indoor MSZ-AP50VGKD | outdoor MUZ-AP50VG


HTB Quote 22 - Floor plan: unit locations & cable route

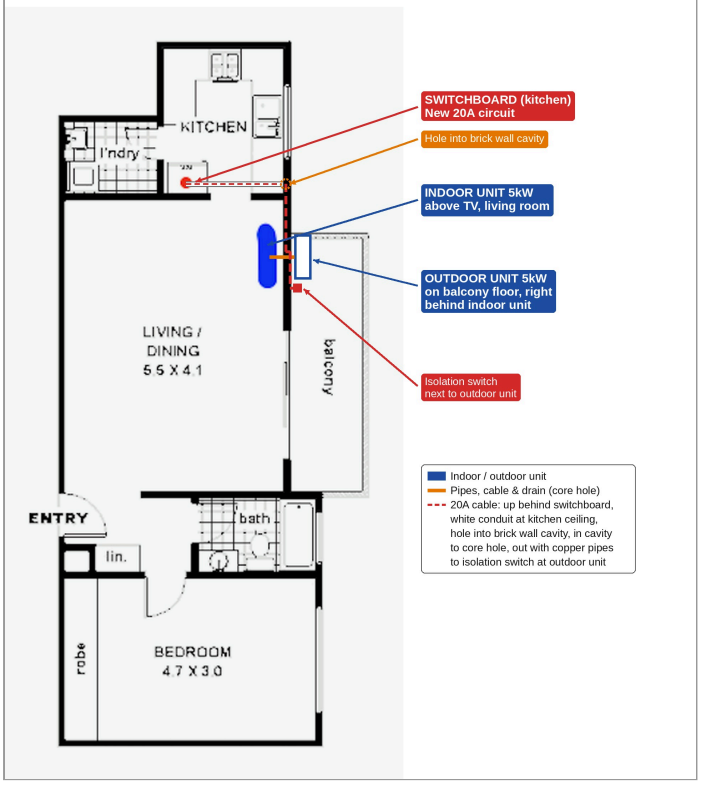

HTB Quote 22 - Balcony: outdoor unit location



HTB Quote 22 - Living room: indoor unit above TV

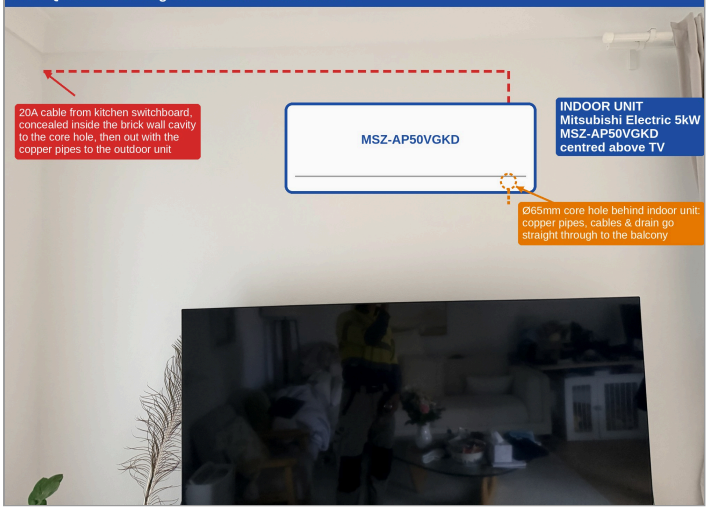

HTB Quote 22 - Kitchen: switchboard & cable route

